





086 5-chamber frame

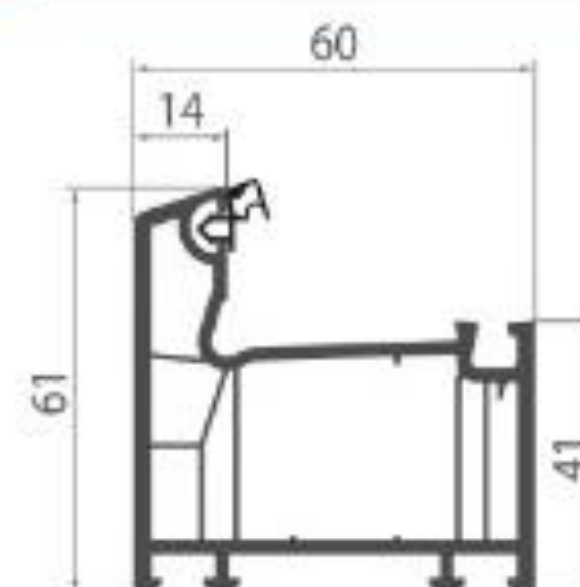


087 5-chamber sash

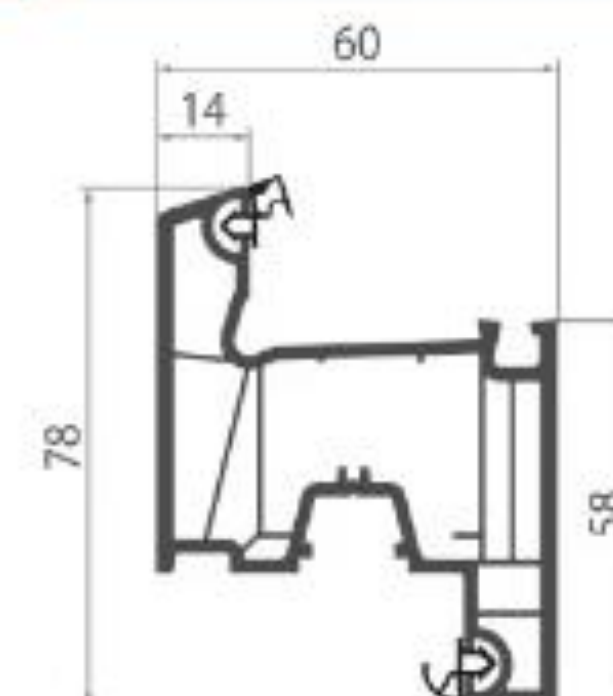

125 3-chamber mullion



012 Stulp

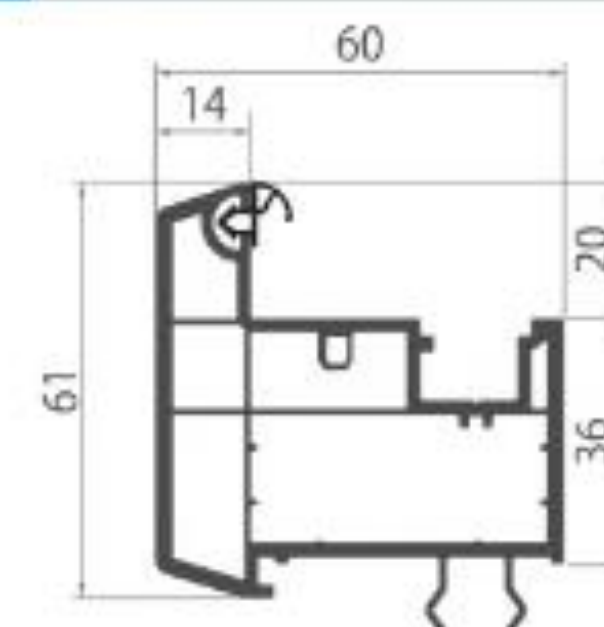

Heat insulation ★ ★ ★ ★ ★

Sound insulation ★ ★ ★ ★ ★

Mounting depth 60 mm

Air permeability up to class 4

Water tightness up to class 7A

Resistance to wind load up to class C4


Drainage inclination 2°

Glazing unit 24, 32 mm
glass 6 mm


Overlap width 14 mm

ADITTIONAL PROFILES


120 Corner adaptor

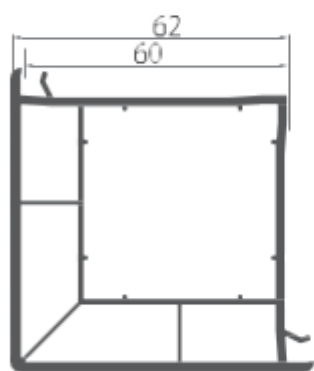


069 Corner adaptor

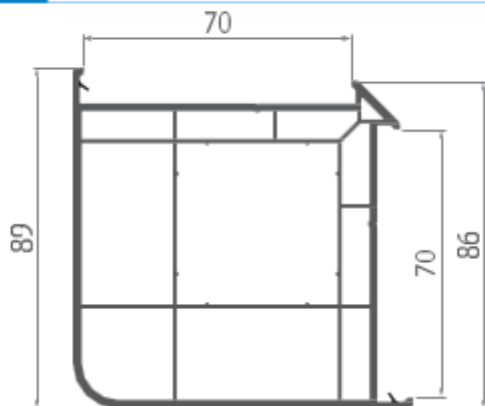


070 Frame extension

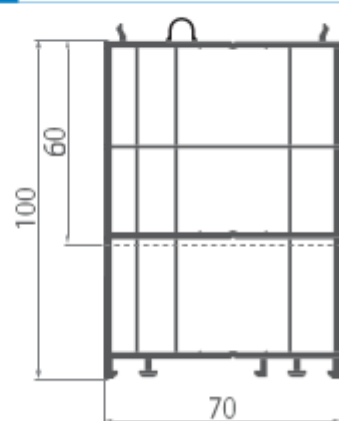


051 Pipe

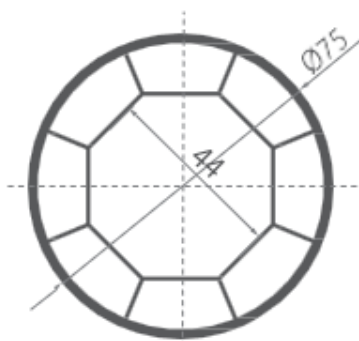


052 Pipe adaptor

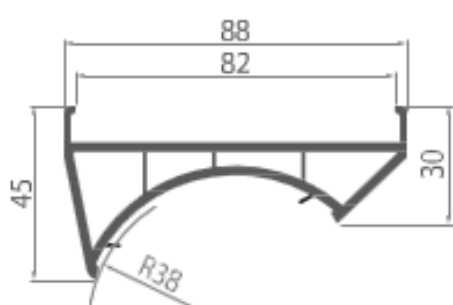


053 Pipe adaptor

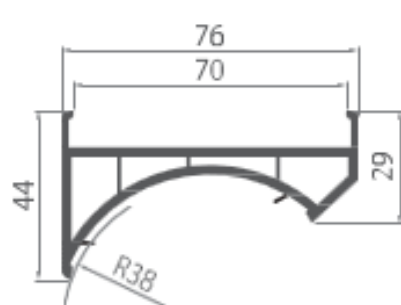


084 Pipe adaptor

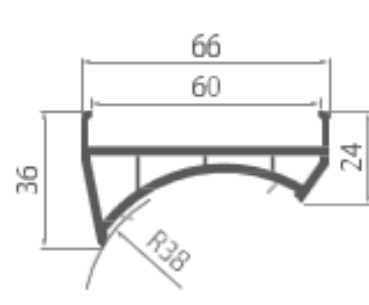


083 Frame extension

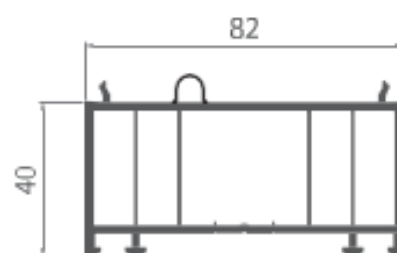


034 Fixed frame




050 Fixed frame




014 I-connector

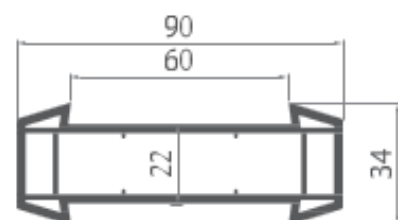


035 I-connector

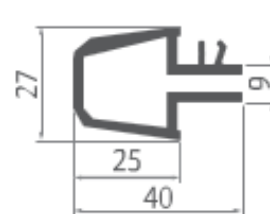


076 I-connector




024 H-connector



074 H-connector

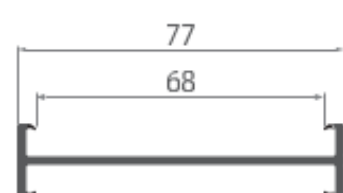

075 H-connector

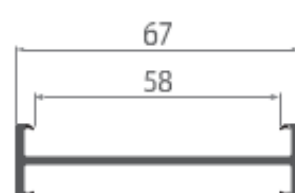

COLORS

BLANCO

ROBLE DORADO

NOGAL

ROBLE MONTAÑA

NEGRO ANTRACITAALUMINIO

GLAZING BEADS

